


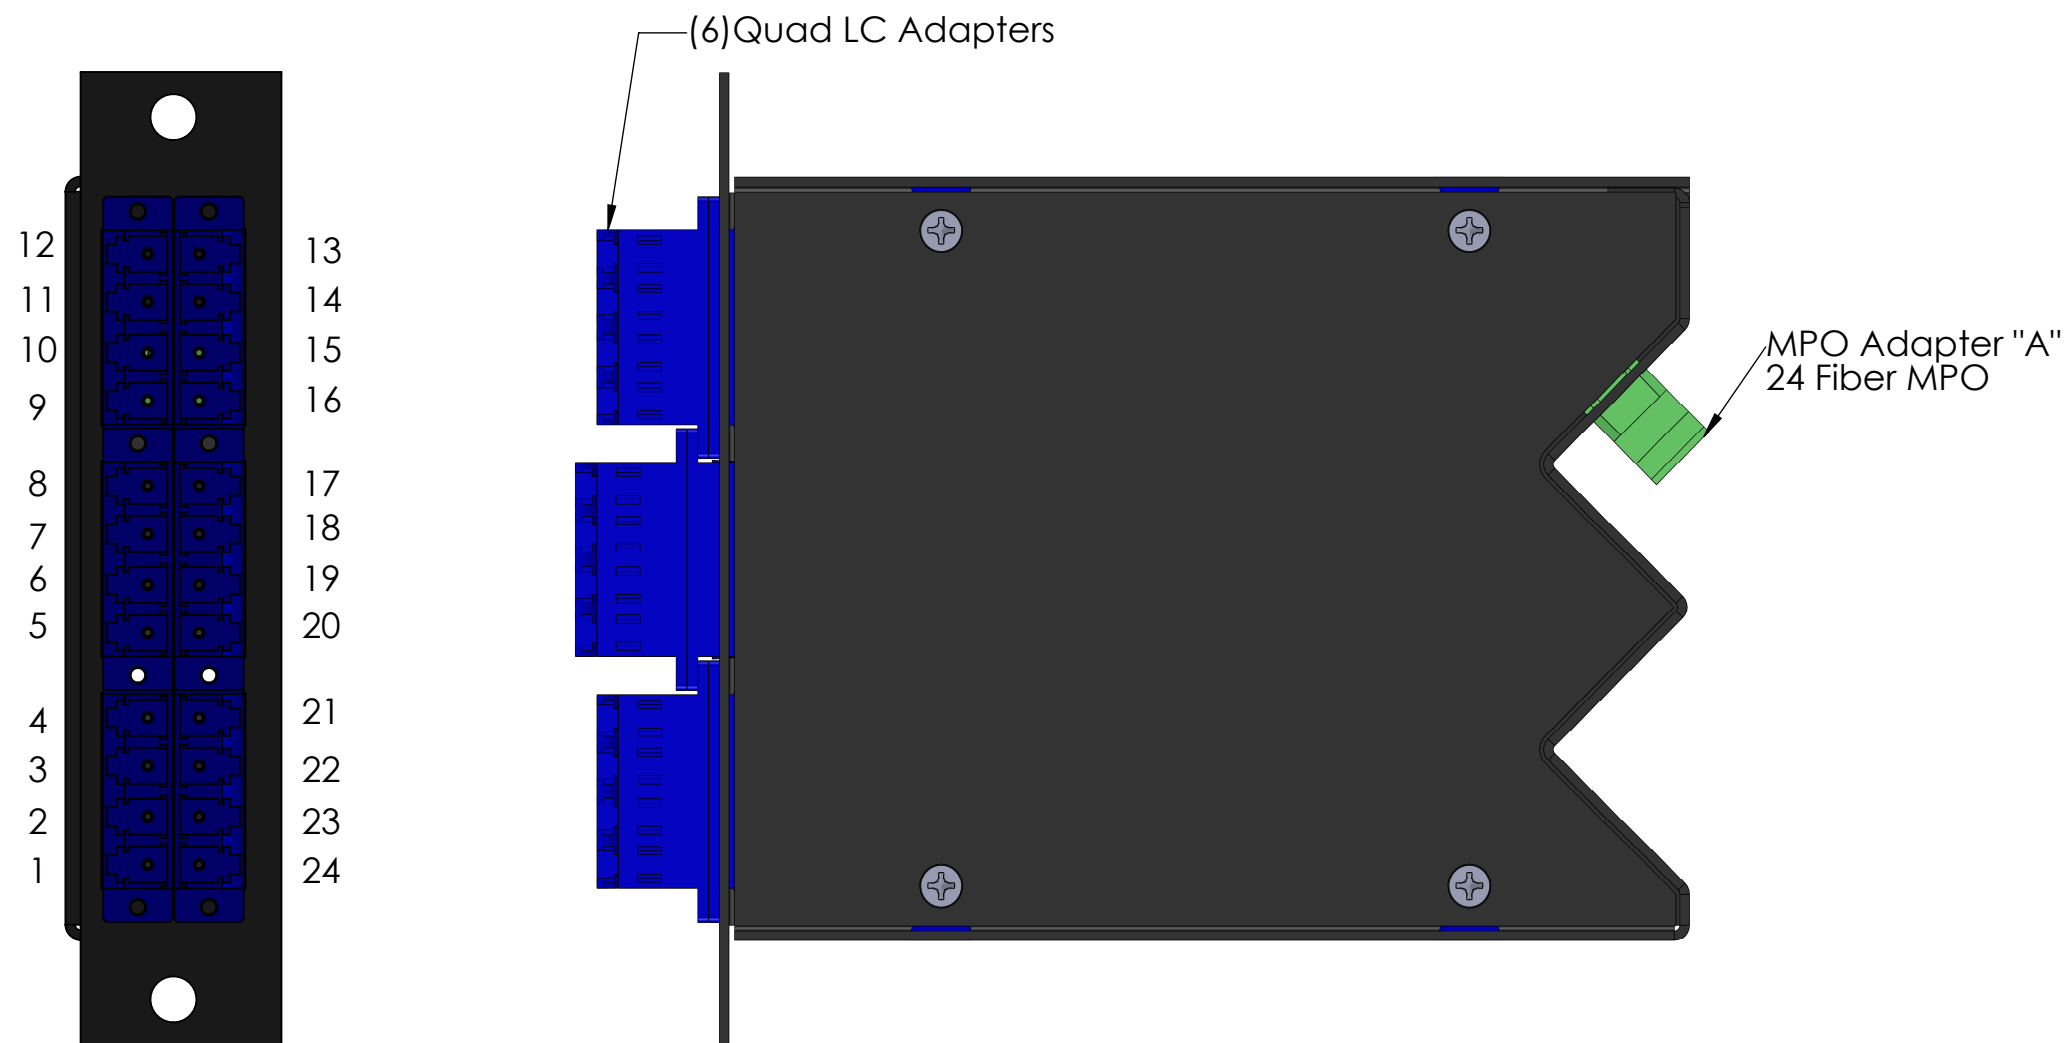

REV.	DESCRIPTION	DATE	APPROVED

Fiberdyne Configuration 465					
OS2, LGX Cassette, SM, 24 Pin 20 Fiber MPO to Two Groups of 12 LCs, Type A					
Fiber Color	Lane Assignment Connector A	Pin # Connector A	LC Position	LC Position	Fiber Color
Blue	Not Used	1	1	Not Used	Blue
Orange	RX1	2	2	TX1	Orange
Green	TX2	3	3	RX2	Green
Brown	RX2	4	4	TX2	Brown
Grey	TX3	5	5	RX3	Grey
White	RX3	6	6	TX3	White
Red	TX4	7	7	RX4	Red
Black	RX4	8	8	TX4	Black
Yellow	TX5	9	9	RX5	Yellow
Purple	RX5	10	10	TX5	Purple
Pink	TX6	11	11	RX6	Pink
Aqua	Not Used	12	12	Not Used	Aqua
Fiber Color	Lane Assignment Connector A	Pin # Connector A	LC Position	LC Position	Fiber Color
Blue	Not Used	13	13	Not Used	Blue
Orange	RX1	14	14	TX1	Orange
Green	TX2	15	15	RX2	Green
Brown	RX2	16	16	TX2	Brown
Grey	TX3	17	17	RX3	Grey
White	RX3	18	18	TX3	White
Red	TX4	19	19	RX4	Red
Black	RX4	20	20	TX4	Black
Yellow	TX5	21	21	RX5	Yellow
Purple	RX5	22	22	TX5	Purple
Pink	TX6	23	23	RX6	Pink
Aqua	Not Used	24	24	Not Used	Aqua

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FIBERDYNE LABS INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FIBERDYNE LABS INC IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE	FIBERDYNE LABS, INC					
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.005 THREE PLACE DECIMAL ±.01	CHECKED	CFO	12/08/14	TITLE: Configuration 465					
			ENG APPR.			OS2, LGX Cassette, SM, 24 Pin 20 Fiber MPO to Two Groups of 12 LCs					
			MFG APPR.			Type A					
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.			SIZE	DWG. NO.				REV
		MATERIAL	COMMENTS:			B					A
		FINISH	CAD FILE:								
NEXT ASSY	USED ON	SEE NOTES									
APPLICATION		DO NOT SCALE DRAWING									