


Fiberdyne Configuration 554

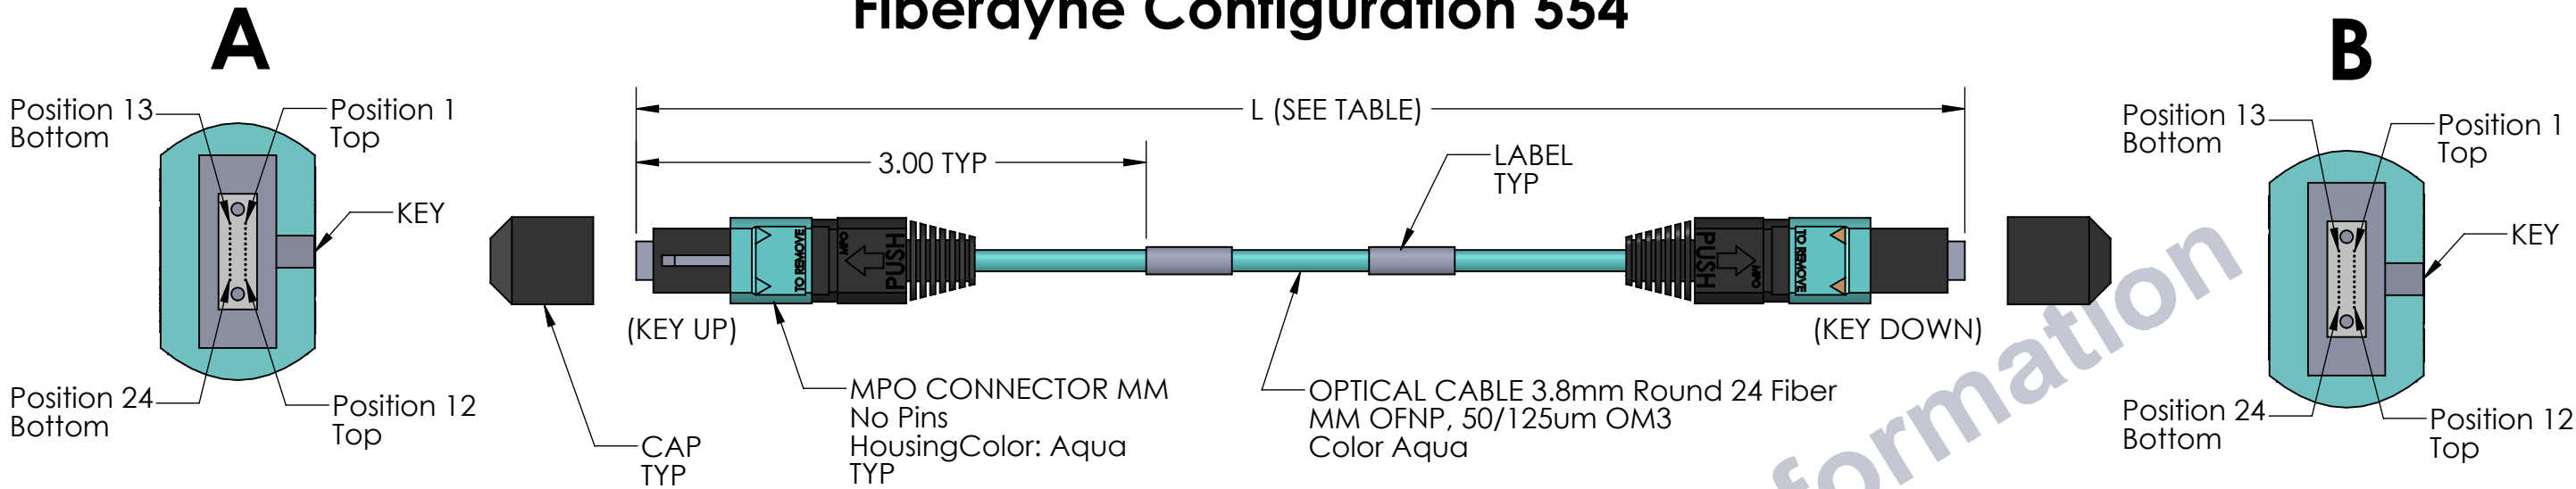

Fiberdyne Part #	L (Meters)		MTP max IL (dB)
	max	min	
FMT-554110-001M	1.050	0.950	0.75
FMT-554110-002M	2.100	1.900	0.75
FMT-554110-005M	5.100	4.900	0.75
FMT-554110-010M	10.150	9.850	0.75
FMT-554110-015M	15.150	14.850	0.75
FMT-554110-020.5M	20.250	19.750	0.75

Fiberdyne Configuration 554			
MPO-MPO, MM OM3, 24 Fiber, No Pins Both Ends			
Fiber Color	Position # Connector A	Position # Connector B	Fiber Color
Blue	1	13	Blue
Orange	2	14	Orange
Green	3	15	Green
Brown	4	16	Brown
Grey	5	17	Grey
White	6	18	White
Red	7	19	Red
Black	8	20	Black
Yellow	9	21	Yellow
Purple	10	22	Purple
Pink	11	23	Pink
Aqua	12	24	Aqua
Fiber Color	Position # Connector A	Position # Connector B	Fiber Color
Blue	13	1	Blue
Orange	14	2	Orange
Green	15	3	Green
Brown	16	4	Brown
Grey	17	5	Grey
White	18	6	White
Red	19	7	Red
Black	20	8	Black
Yellow	21	9	Yellow
Purple	22	10	Purple
Pink	23	11	Pink
Aqua	24	12	Aqua

RoHS

FIBERDYNE LABS INC.		
TITLE: Fiberdyne Configuration 554		
MPO-MPO, MM, 50/125um, OM3, OFNP, 24 Fiber, No Pins Both Ends		
SIZE	DWG. NO.	REV
B	900_12446_001	-1
SCALE: 1:1		SHEET 1 OF 1

	-1	Original Publication	12/07/15	FMO
ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLEWITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.