

Cable Diameter Options: 1.2mm, 1.6mm, 2mm, 3mm

Custom Labeling Available

Other Cable & Connector Combinations Available


Boot Options:

- Short boots
- Bendable Boots
- Uni-Boots available for LCs
- *45° Boots
- *90° Boots

*Not available for all connector styles

LC & SC connectors available with or without clips/yokes

Plenum cable available upon request

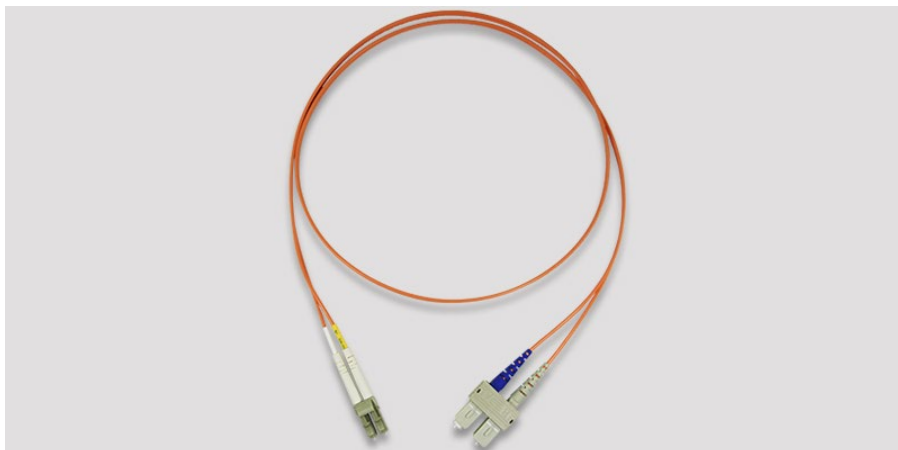

Multimode Duplex LC Clipped SC Yoked

Cable & Connector Specifications:	
Fiber Type	62.5/125 OM1 Multimode
Insertion Loss Per Connector	<0.4dB, Typical 0.25dB
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Listing	C (UL) US, C (ETL) US
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Connector Compliance	GR-326
Parts Compliance	RoHS
Endface Cleanliness	IEC61300-3-35-ED2 or newer

62.5/125 OM1 Multimode Duplex Riser 2.0mm Jacketed		
LC-LC Duplex	F9C21B4GCCCXXX	Specify Length When Ordering
LC-SC Duplex	F9C21B4GCCYXXX	Specify Length When Ordering
SC-SC Duplex	F9C21B4GCYXXX	Specify Length When Ordering
SC-ST Duplex	F9C21B4GCY1XXX	Specify Length When Ordering
ST-ST Duplex	F9C21B4GC11XXX	Specify Length When Ordering

Note: Part numbers above depict optional clipped LC and SC connectors

Other Cable & Connector Combinations available.