

Custom Labeling Available

Other Connector Combinations Available

Boot Options:


- Short Boots
- Bendable Boots
- *45° Boots
- *90° Boots
- Uni-Boots available for LCs

LC & SC connectors available with or without duplex clips/yokes

Plenum cable available upon request

[2mm cables available](#)

***Not available on all boots**

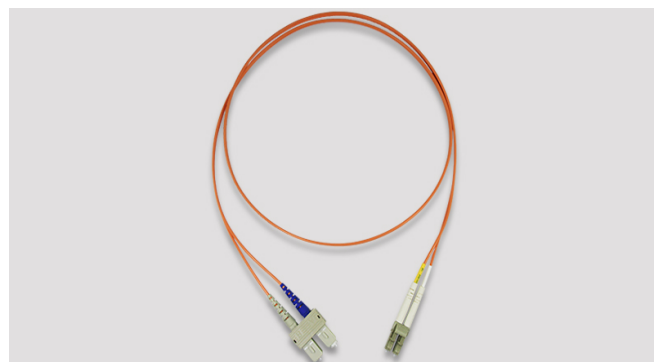

Multimode Duplex SC Yoked LC Clipped

Cable & Connector Specifications:	
Fiber Type	62.5/125 OM1 Multimode
Insertion Loss Per Connector	<0.4dB, Typical 0.25dB
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	3cm To 5cm Available
Standard Compliance	Telcordia

62.5/125 OM1 Multimode Duplex Riser 3.0mm Jacketed		
LC-LC Duplex	F9C21B2GCCCXXX	Specify Length When Ordering
LC-SC Duplex	F9C21B2GCCYXXX	Specify Length When Ordering
SC-SC Duplex	F9C21B2GCYYXXX	Specify Length When Ordering
SC-ST Duplex	F9C21B2GCY1XXX	Specify Length When Ordering
ST-ST Duplex	F9C21B2GC11XXX	Specify Length When Ordering

Other Connector Combinations available.