62.5/125 OM1 Multimode Simplex Pigtail Riser 2.0mm

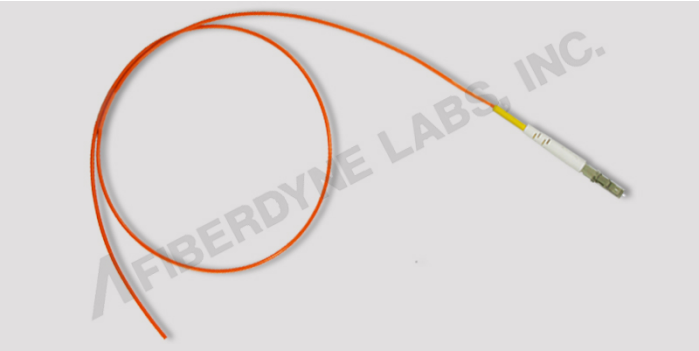

Custom Labeling Available
Other Connector Combinations Available
Boot Options:

- Short Boots
- Bendable Boots
- *45° Boots
- *90° Boots
- Uni-Boots available for LCs

LC & SC connectors available with or without duplex clips/yokes
Plenum cable available upon request
3mm cables available
***Not available on all boots**

Cable & Connector Specifications:	
Fiber Type	62.5/125 OM1 Multimode
Insertion Loss Per Connector	< 0.3dB, Typical 0.25dB
Return Loss VS. Polish Type	UPC: > 50dB, Typical 55dB APC: > 60dB, Typical 65dB
Apex Offset	< 50µm
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	2.2cm to 3.5cm Available

62.5/125 OM1 Multimode Simplex Pigtail Riser 2.0mm		
LC-Pigtail Simplex	F9G11B4GCL0XXXM	Specify Length When Ordering
SC-Pigtail Simplex	F9G11B4GC60XXXM	Specify Length When Ordering
ST-Pigtail Simplex	F9G11B4GC10XXXM	Specify Length When Ordering
FC-Pigtail Simplex	F9G11B4GC70XXXM	Specify Length When Ordering

Other Connector Combinations available.

© Fiberdyne Labs, Inc. www.fiberdyne.com sales@fiberdyne.com 127 Business Park Drive, Frankfort, New York 13340 February 19, 2021 PS4218 Rev A